



www.aqua-amanzi.co.za
sales@aqua-amanzi.co.za




TURN TAP WATER INTO PROFIT

italbedis®

WATER, NATURALLY. SINCE 1989.

UPPERCOUNTER WATERCOOLER

FLUX 30

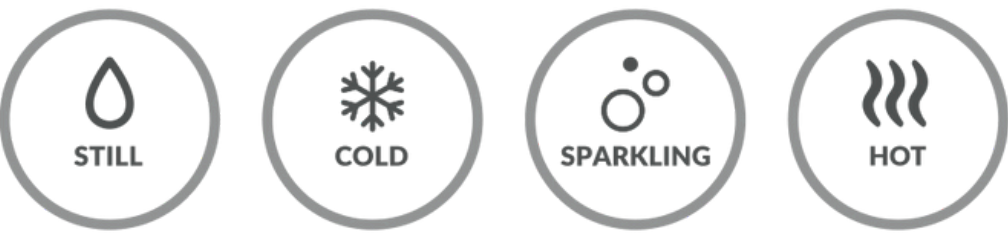





Flux 30 is the aesthetically appealing uppercounter that combines the need for high performance with compactness. Connected to the water supply, it dispenses cold, still and sparkling water. In the HOT version, there is the additional feature of dispensing hot water at the ideal temperature for brewing tea and herbal infusions. **Additionally, it is possible to set a timed dose to ensure precise and automatic dispensing.**

As standard is equipped with an anti-flooding system and the Spider UV LED bactericidal system.

Available colors



Dispenser	Production of cooled water	Production of hot water	Boiler capacity	Cooling	Compressor power	Carbonator pump	Carbonator capacity	Weight	Sizes (LxPxH)*
 Flux 30 Plus	30 l/h	-		Direct exchange	1/10 Hp	150 l/h	1,5 l	22 kg	29x33x41 cm
 Flux 30 Natural	30 l/h	-		Direct exchange	1/10 Hp	Not present	-	18 kg	29x33x41 cm
 Flux 30 Plus HOT	30 l/h	16 l/h	0,8 l	Direct exchange	1/10 Hp	150 l/h	1,5 l	23 kg	29x33x41 cm
 Flux 30 Natural HOT	30 l/h	16 l/h	0,8 l	Direct exchange	1/10 Hp	Not present	-	19 kg	29x33x41 cm

*drip tray included



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



R290
NATURAL REFRIGERANT GAS

Vertical operation. MAX inlet temperature: 35°C. MAX operating pressure: 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.